



ROTARY
CYLINDER

中空回転油圧シリンダ



SR series



■ KITAGAWAチャックの仕様に合わせた最適設計

- 大きな貫通穴を実現
- クーラントコレクタ無しの仕様です。
クーラントコレクタ付はSR_Cシリーズをご覧ください。

■ 寸法図

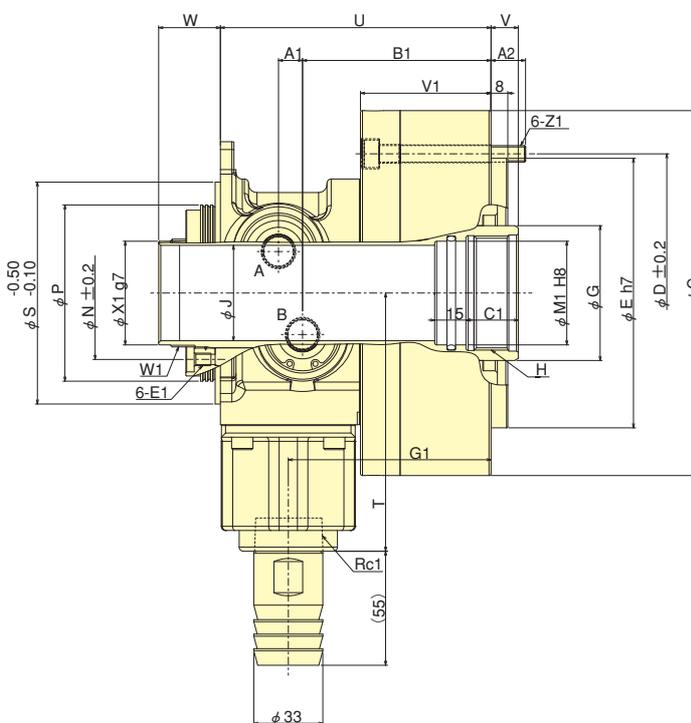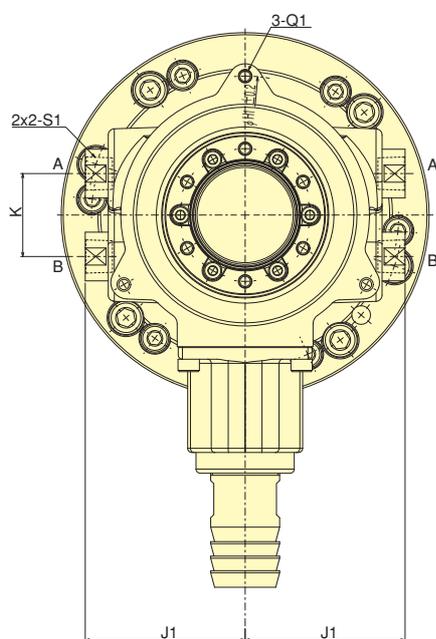

■ 寸法表

寸法	C	D	E	G	H	J	K	N	P	S	T	U	V max.	V min.	W max.	W min.	A1	B1	C1	E1	G1	H1	J1	M1	Q1	S1	V1	W1	X1	Z1	A2
SR1146	176	147	130	65	M55x2	46	40	64	85	107	124.5	129.5	13	-3	45.5	29.5	11.5	90.2	25	M6x8	97	134	76.5	50	M6	Rc3/8	62.5	M52x1.5	50	M8	16.5
SR1453	200	165	140	70	M60x2	53	40	73	96	117	130	133.5	19	0	53	34	11.5	94.2	30	M6x12	101	144	82.5	55	M6	Rc3/8	66.5	M68x1.5	56	M8	13
SR1566	210	190	168	85	M75x2	66	48	88	111	137	150	154.5	22	0	52	30	12.7	107.9	35	M6x12	108	169	98	70	M6	Rc1/2	73	M74x1.5	71.5	M10	18
SR1670	222	195	160	95	M78x2	70	46	103	126	157	175	171	22	-1	53	30	15.5	115.5	35	M6x12	122.5	189	98.5	75	M6	Rc1/2	72	M89x2	86	M10	19
SR1675	222	195	160	95	M85x2	75	46	103	126	157	175	171	22	-1	53	30	15.5	115.5	35	M6x12	122.5	189	98.5	80	M6	Rc1/2	72	M89x2	86	M10	19
SR1677	222	195	160	100	M88x2	77	46	103	126	157	175	171	22	-1	53	30	15.5	115.5	35	M6x12	122.5	189	98.5	80	M6	Rc1/2	72	M89x2	86	M10	19
SR1781	230	205	168	100	M90x2	81	46	103	126	157	175	176	23	-2	55	30	15.5	120.5	35	M6x12	127.5	189	98.5	85	M6	Rc1/2	77	M89x2	86	M10	19

■ 仕様表

型式	貫通穴径 mm	ピストンストローク mm	ピストン表面積		ピストン推力		最高使用油圧力 MPa	許容最高回転速度 min ⁻¹	慣性モーメント kg·m ²	質量 kg	総リーク量 ℓ/min
			押側 cm ²	引側 cm ²	押側 kN	引側 kN					
SR1146	46	16	87	76	32.8	28.6	4.0	6000	0.026	11	3.0
SR1453	53	19	121	111	47.9	43.9	4.2	6000	0.045	14	3.9
SR1566	66	22	132	120	49.7	45.0	4.0	5000	0.064	19	4.0
SR1670	70	23	150	143	56.4	53.6	4.0	4500	0.086	24.5	4.3
SR1675	75	23	150	143	56.4	53.6	4.0	4500	0.084	23.5	4.3
SR1677	77	23	150	135	56.4	50.7	4.0	4500	0.084	23.5	4.3
SR1781	81	25	171	156	64.3	58.7	4.0	4500	0.095	23.5	4.3


※総リーク量：油圧力3.0MPa、油温50℃の時 ※ピストン推力：最高使用油圧力時



**ROTARY
CYLINDER**

Next-Generation Hydraulic Cylinder with Large Through-Hole



SR series

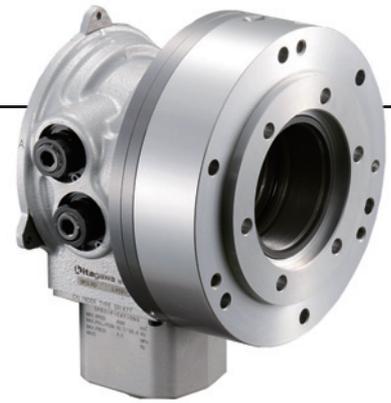

Suitable design for KITAGAWA chuck

- Large through-hole
- This model is not equipped with a coolant collector.
For models equipped with a coolant collector, please see the SR_C series.

Dimensional Drawings

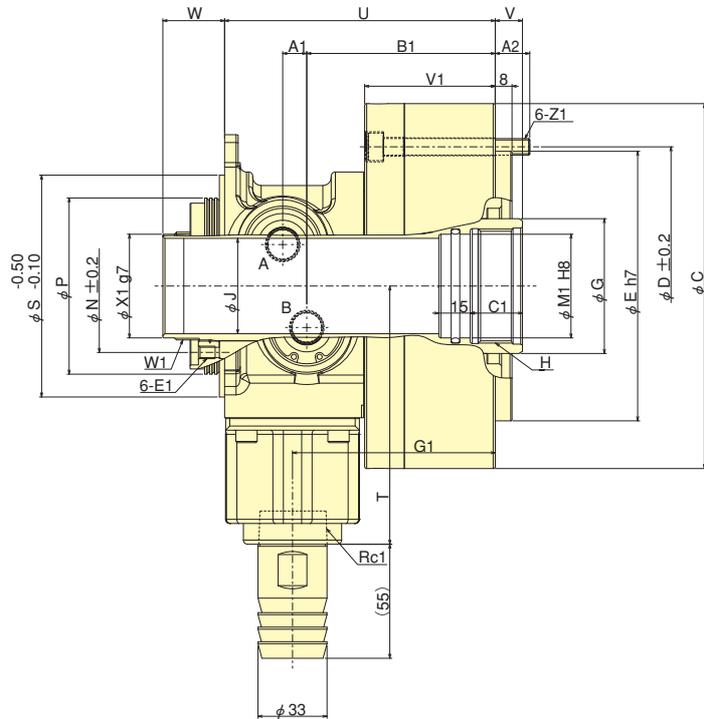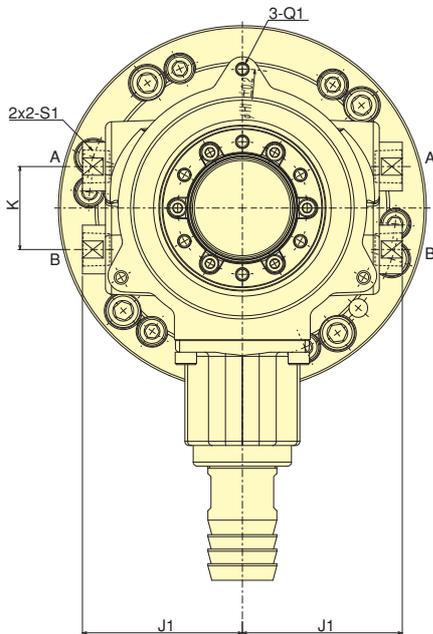

回転
シリンダー
Cylinder

Dimensions

Dimensions	C	D	E	G	H	J	K	N	P	S	T	U	V	V	W	W	A1	B1	C1	E1	G1	H1	J1	M1	Q1	S1	V1	W1	X1	Z1	A2
Model																															
SR1146	176	147	130	65	M55x2	46	40	64	85	107	124.5	129.5	13	-3	45.5	29.5	11.5	90.2	25	M6x8	97	134	76.5	50	M6	Rc3/8	62.5	M52x1.5	50	M8	16.5
SR1453	200	165	140	70	M60x2	53	40	73	96	117	130	133.5	19	0	53	34	11.5	94.2	30	M6x12	101	144	82.5	55	M6	Rc3/8	66.5	M68x1.5	56	M8	13
SR1566	210	190	168	85	M75x2	66	48	88	111	137	150	154.5	22	0	52	30	12.7	107.9	35	M6x12	108	169	98	70	M6	Rc1/2	73	M74x1.5	71.5	M10	18
SR1670	222	195	160	95	M78x2	70	46	103	126	157	175	171	22	-1	53	30	15.5	115.5	35	M6x12	122.5	189	98.5	75	M6	Rc1/2	72	M89x2	86	M10	19
SR1675	222	195	160	95	M85x2	75	46	103	126	157	175	171	22	-1	53	30	15.5	115.5	35	M6x12	122.5	189	98.5	80	M6	Rc1/2	72	M89x2	86	M10	19
SR1677	222	195	160	100	M88x2	77	46	103	126	157	175	171	22	-1	53	30	15.5	115.5	35	M6x12	122.5	189	98.5	80	M6	Rc1/2	72	M89x2	86	M10	19
SR1781	230	205	168	100	M90x2	81	46	103	126	157	175	176	23	-2	55	30	15.5	120.5	35	M6x12	127.5	189	98.5	85	M6	Rc1/2	77	M89x2	86	M10	19

Specifications

Specifications	Thru-Hole mm	Piston stroke mm	Piston Area		Piston thrust		Max. Operation Pressure MPa	Max. Speed min ⁻¹	Moment of Inertia kg·m ²	Net Weight kg	Leakage l / min
			Push Side cm ²	Pull Side cm ²	Push Side kN	Pull Side kN					
SR1146	46	16	87	76	32.8	28.6	4.0	6000	0.026	11	3.0
SR1453	53	19	121	111	47.9	43.9	4.2	6000	0.045	14	3.9
SR1566	66	22	132	120	49.7	45.0	4.0	5000	0.064	19	4.0
SR1670	70	23	150	143	56.4	53.6	4.0	4500	0.086	24.5	4.3
SR1675	75	23	150	143	56.4	53.6	4.0	4500	0.084	23.5	4.3
SR1677	77	23	150	135	56.4	50.7	4.0	4500	0.084	23.5	4.3
SR1781	81	25	171	156	64.3	58.7	4.0	4500	0.095	23.5	4.3

※Leakage: Pressure 3.0MPa and oil temperature 50°C ※Piston thrust: at Max. Operation Pressure